
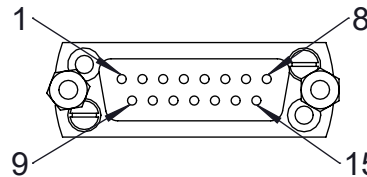


connecting view connector		connecting view cable	
Con	Cable	Cable	Con
1	1	1	1
2	3	2	9
3	5	3	2
4	7	4	10
5	9	5	3
6	11	6	11
7	13	7	4
8	15	8	12
9	2	9	5
10	4	10	13
11	6	11	6
12	8	12	14
13	10	13	7
14	12	14	15
15	14	15	8

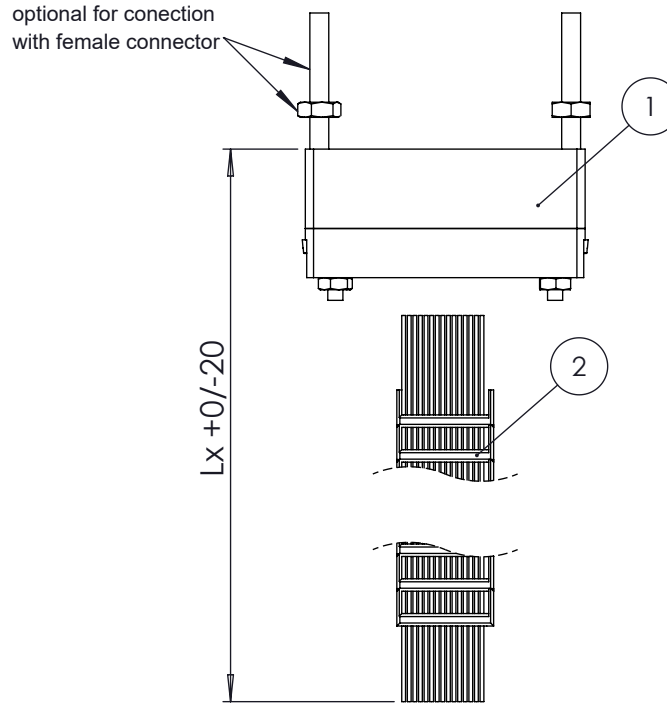

connector 211-MS15-PK

POS.	DESCRIPTION	QTY
1	UHV connector 15 pin (male)	1
2	ribbon cable 15 pin Kapton insulated	1

no leakcheck required
Definition Leckprüfung (definiton leak check)

Zeichnung Nutzung (using drawing) Drawing external use for customer		Verwendetes Material (USED MATERIAL)		Bemerkung (REMARKS)		Kanten (EDGES)		PROJECTION	
All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individually or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allectra GmbH.		Werkstoff (MATERIAL): Gewicht (WIGHT):		Toleranz (TOLERANCE)					
		Oberfläche (SURFACE) Cleaned UHV- Compatible							
origin	name	Allectra standard		DATE	NAME		Benennung (DESCRIPTION): 15 pin male connector, PEEK with 1 off 15 way ribbon cable		
	(drw/doc/sketch)			Design	21.02.2024	AD			
	date			Drawn	22.02.2024	AD			
				Check	22.02.2024	JUB			
00	first origin		Approv	22.02.2024	AD	Zeich. Nr. (Drw. No.): 380-D15-MXPR-X REV 00			
REV Beschreibung (CHANGING)				Art. Nr. (PART NO.)					
		gesp. am (SAVE DAT.): 22.02.2024							