
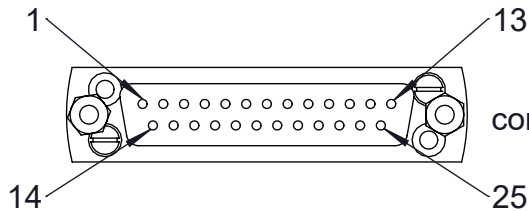


connecting view connector		connecting view cable	
con	cable	cable	con
1	1	1	1
2	3	2	14
3	5	3	2
4	7	4	15
5	9	5	3
6	11	6	16
7	13	7	4
8	15	8	17
9	17	9	5
10	19	10	18
11	21	11	6
12	23	12	19
13	25	13	7
14	2	14	20
15	4	15	8
16	6	16	21
17	8	17	9
18	10	18	22
19	12	19	10
20	14	20	23
21	16	21	11
22	18	22	24
23	20	23	12
24	22	24	25
25	24	25	13
26	X	26	X

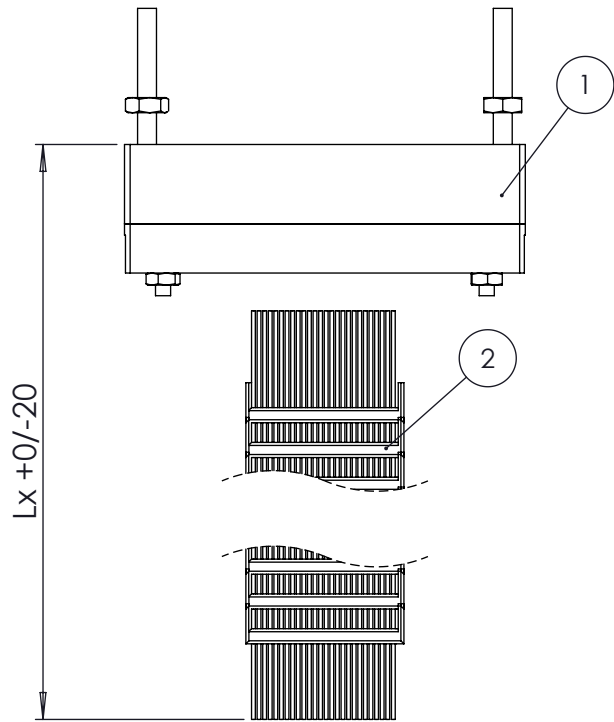

connector 211-MS25-PK

POS.	DESCRIPTION	QTY
1	UHV connector 25 pin (male)	1
2	ribbon cable 26 pin Kapton insulated	1

Zeichnung Nutzung (using drawing)			Verwendetes Material (USED MATERIAL)			Bemerkung (REMARKS)			Kanten (EDGES)		PROJECTION									
Drawing external use for customer						Werkstoff (MATERIAL):			Gewicht (WIGHT):			Toleranz (TOLERANCE)								
All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allectra GmbH.						Oberfläche (SURFACE)			Maßstab (SCALE):		Format. (FORM)		PAGE NO		PAGES		Rauheit (ROUGHNESS)			
						Cleaned UHV- Compatible			1:1		A4		1		1					
origin	name		Allectra standard						DATE		NAME			Benennung (DESCRIPTION): 25 pin male connector, PEEK with 1 off 26 way ribbon cable						
	(drw/doc/sketch)					Design			21.02.2024		AD									
	date					Drawn			22.02.2024		AD									
						Check			22.02.2024		JUB									
			REV			Approv			22.02.2024		AD			Zeich. Nr. (Drw. No.): 380-D25-MXPR-X						REV 00
REV	Beschreibung (CHANGING)					gesp. am (SAVE DAT.):			22.02.2024			Art. Nr. (PART NO.)								