

01


01

connecting view
connector

con1	con2	cable
1	8	1
2	7	3
3	6	5
4	5	7
5	4	9
6	3	11
7	2	13
8	1	15
9	15	2
10	14	4
11	13	6
12	12	8
13	11	10
14	10	12
15	9	14

connecting view
cable

cable	con 1	con 2
1	1	8
2	9	15
3	2	7
4	10	14
5	3	6
6	11	13
7	4	5
8	12	12
9	5	4
10	13	11
11	6	3
12	14	10
13	7	2
14	15	9
15	8	1

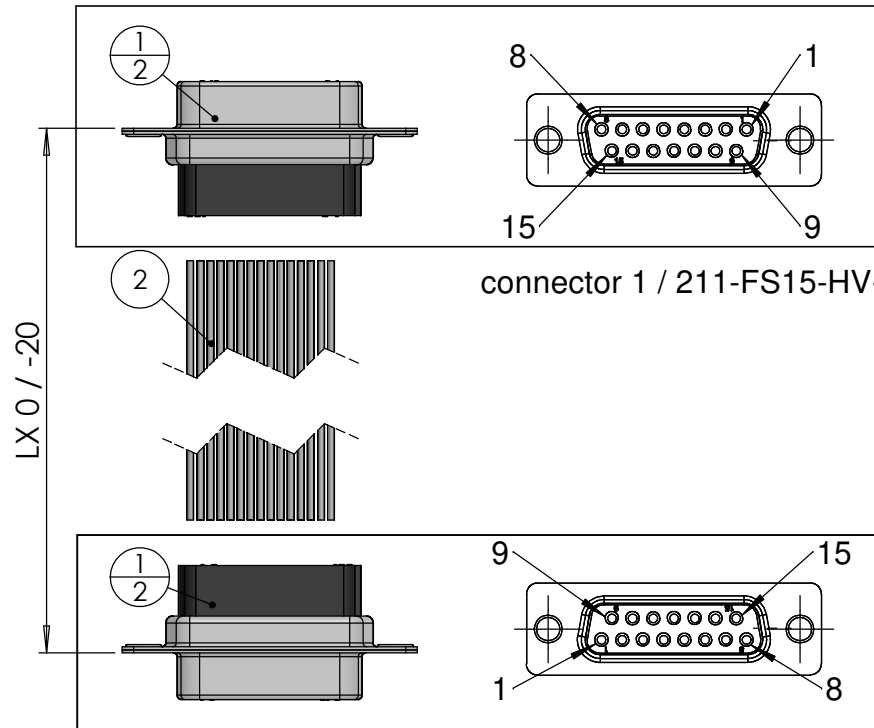

connector 1 / 211-FS15-HV-V2 basic for feedthrough 01

connector 2 / 211-FS15-HV-V2 basic customer 01

POS-NR.	DESCRIPTION	QTY
1	SUB-D connector 15 pin (HV female) TYP V2	2
2	ribbon cable 15 pin PTFE insulated	1

Bemerkungen (Remarks)				Freimaßtoleranz (Standard Toleranz)		Maßstab (Scale)	Rauheit (Roughness)		europ.Projektion	
All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allestra GmbH.						1:1	✓		Kanten (edges)	
							Material, Standard Oberfläche (Treatment)		Gewicht (weight)	
				Design		05.10.2020	AD		48.00	
				Drawn		06.10.2020	AD		Page: 2	
				Check					Pages: 5	
									Revision	
01	tables revised new connector V2	05.10.20	AD			Zeichnungsnummer (Drawing No.)		380-D15-FFHPT-X		01
Index	Modification	Datum	Name			Datei (File)		C:\PDM-Store\I:\PDM-Store\		Format A4

Material, Standard
Oberfläche
(Treatment)

Bezeichnung
(Title)

cable with 2 off 15 pin female connectors HV
with 1 off 15 way ribbon cable, PTFE