
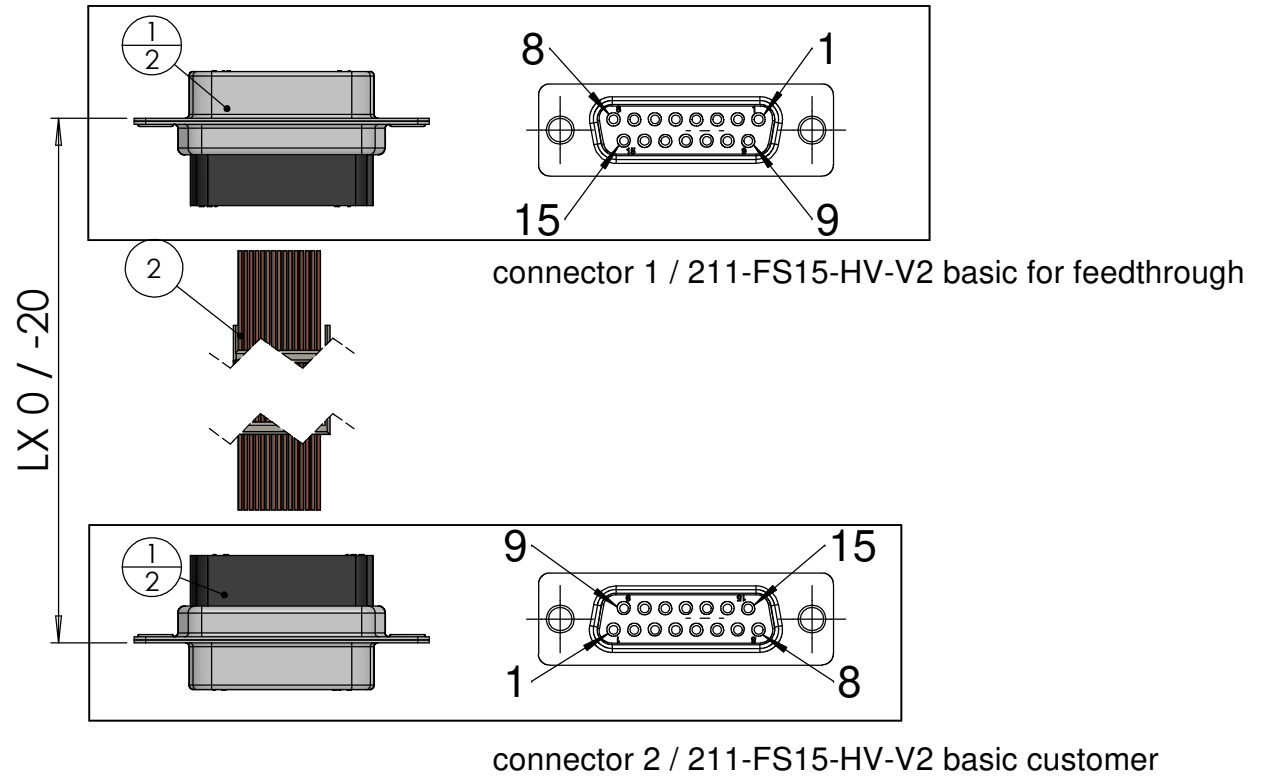


connecting view connector			connecting view cable		
con1	con2	cable	cable	con 1	con 2
1	8	1	1	1	8
2	7	3	2	9	15
3	6	5	3	2	7
4	5	7	4	10	14
5	4	9	5	3	6
6	3	11	6	11	13
7	2	13	7	4	5
8	1	15	8	12	12
9	15	2	9	5	4
10	14	4	10	13	11
11	13	6	11	6	3
12	12	8	12	14	10
13	11	10	13	7	2
14	10	12	14	15	9
15	9	14	15	8	1



POS-NR.	DESCRIPTION	QTY
1	SUB-D connector 15 pin (HV female) TYP V2	2
2	ribbon cable 15 pin Kapton insulated	1

Bemerkungen (Remarks)				Freimaßtoleranz (Standard Toleranz)		Maßstab (Scale)	Rauheit (Roughness)		europ.Projektion		
All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allectra GmbH.						1:1					
							Material, Standard Oberfläche (Treatment)				
					Design	16.11.2020	AD	Bezeichnung (Title) cable with 2 off 15 pin female connectors HV, type V2 with 1 off 15 way ribbon cable, kapton		Gewicht (weight) 40.25	
					Drawn	16.11.2020	AD			g	
					Check					9	
										40.25	
										Page:	Pages:
										2	5
							Zeichnungsnummer (Drawing No.)		Revision		
				380-D15-FFHR-X							
Index	Modification	Datum	Name			Datei (File)		C:\PDM-Store\I\C:\PDM-Store\		Format A4	