


Connector 1/ 211-FS15-HV basic for feedthrough

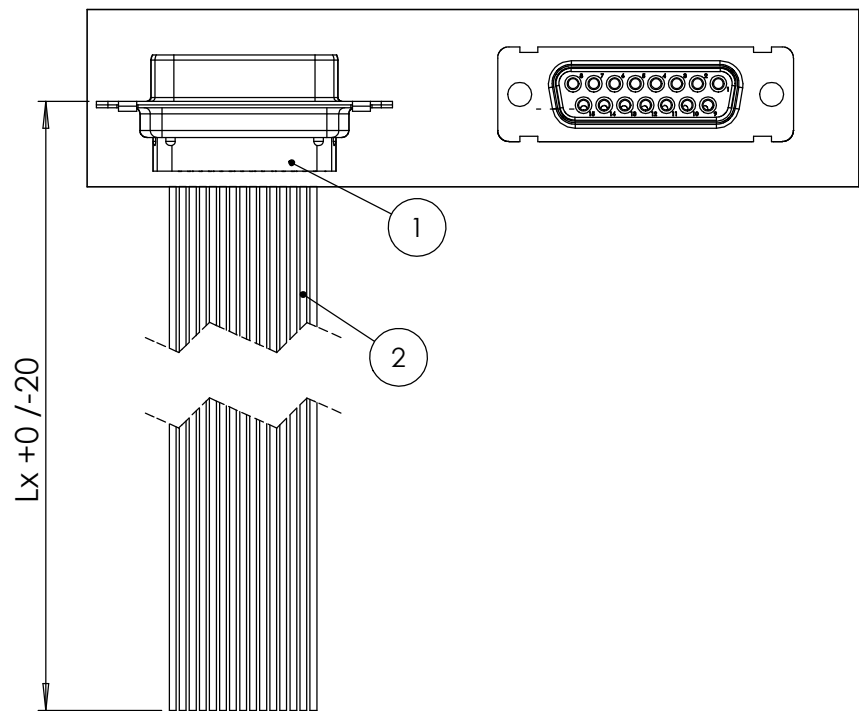

Connecting view connector			Connecting view cable		
Cable 1	Con1	Cable 1	Cable 1	Cable1	Con1
	1	1		1	1
	2	3		2	9
	3	5		3	2
	4	7		4	10
	5	9		5	3
	6	11		6	11
	7	13		7	4
	8	15		8	12
	9	2		9	5
	10	4		10	13
	11	6		11	6
	12	8		12	14
	13	10		13	7
	14	12		14	15
	15	14		15	8

POS-NR.	DESCRIPTION	QTY
1	Connector 15 pin Sub-D female	1
2	ribbon cable 15 pin Kapton insulated	1

Bemerkungen (Remarks)				Freimaßtoleranz (Standard Toleranz)		Maßstab (Scale)	Rauheit (Roughness)		europ.Projektion	
All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allectra GmbH.				Datum		1:10	Material, Standard Oberfläche (Treatment)		Kanten (edges)	
				Design	20.07.2016	JB	Bezeichnung (Title)		Gewicht (weight)	
				Drawn	20.07.2016	JB				
				Check						
							SUB-D HV female connector 15 pin with 1x 15 way PTFE ribbon cable		24.53	
									Page:	Pages:
									2	5
							Zeichnungsnummer (Drawing No.)		Revision	
							380-D15-FXHPT-X			
							Datei (File)		Format	
							C:\PDMStore\I:\PDMStore\		A4	

