

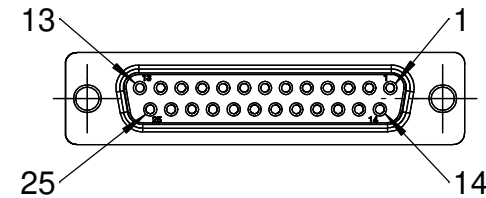


POS-NR.	DESCRIPTION	QTY
1	SUB-D connector 25 pin (HV female) TYP V2	2
2	ribbon cable 25 pin PTFE insulated	1


Connecting view connector			Connecting view cable		
Con1	Con2	Cable	Cable	Con1	Con2
1	13	1	1	1	13
2	12	3	2	14	25
3	11	5	3	2	12
4	10	7	4	15	24
5	9	9	5	3	11
6	8	11	6	16	23
7	7	13	7	4	10
8	6	15	8	17	22
9	5	17	9	5	9
10	4	19	10	18	21
11	3	21	11	6	8
12	2	23	12	19	20
13	1	25	13	7	7
14	25	2	14	20	19
15	24	4	15	8	6
16	23	6	16	21	18
17	22	8	17	9	5
18	21	10	18	22	17
19	20	12	19	10	4
20	19	14	20	23	16
21	18	16	21	11	3
22	17	18	22	24	15
23	16	20	23	12	2
24	15	22	24	25	14
25	14	24	25	13	1

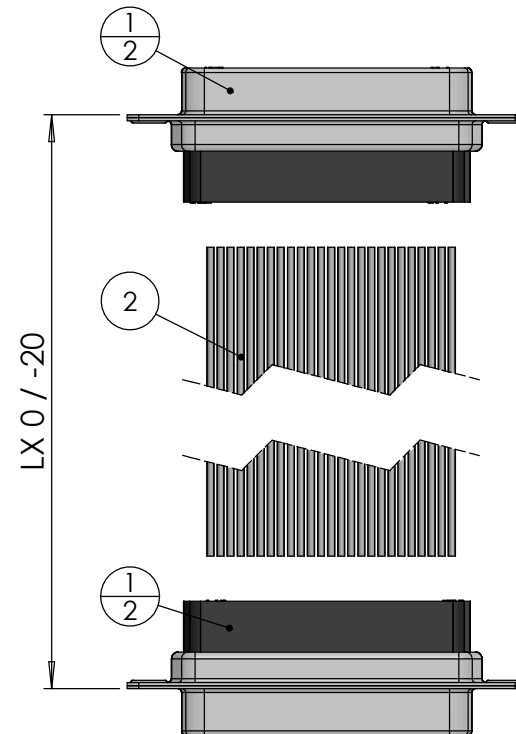

connector 1 / 211-FS25-HV-V2 basic for feedthrough 01

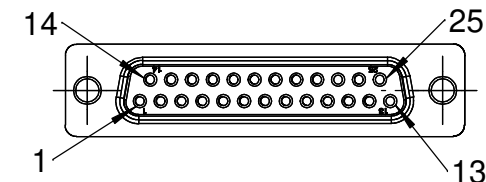

connector 2 / 211-FS25-HV-V2 basic customer 01

Bemerkungen (Remarks)				Freimaßtoleranz (Standard Toleranz)		Maßstab (Scale)	Rauheit (Roughness)		europ.Projektion	
All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allestra GmbH.						1:1				
					Datum	Name	Material, Standard Oberfläche (Treatment) Bezeichnung (Title) cabel with 2 off 25 pin female connectors HV with 1 off 25 way ribbon cable, PTFE		Kanten (edges) 	
				Design	05.10.2020	AD			Gewicht (weight) 9	
				Drawn	06.10.2020	AD			49.41	
				Check					Page:	Pages:
									3	5
							Zeichnungsnummer (Drawing No.) 380-D25-FFHPT-X		Revision 01	
01	tables revised new connector V2	05.10.20	AD							
Index	Modification	Datum	Name				Datei (File) C:\PDM-Store\C\PDM-Store\		FormatA4	