


POS-NR.	DESCRIPTION	QTY
1	UHV connector 25 pin	2
2	ribbon cable 26 pin Kapton insulated	1

connecting view connector			connecting view cable		
con1	con2	cable	cable	con1	con2
1	13	1	1	1	13
2	12	3	2	14	25
3	11	5	3	2	12
4	10	7	4	15	24
5	9	9	5	3	11
6	8	11	6	16	23
7	7	13	7	4	10
8	6	15	8	17	22
9	5	17	9	5	9
10	4	19	10	18	21
11	3	21	11	6	8
12	2	23	12	19	20
13	1	25	13	7	7
14	25	2	14	20	19
15	24	4	15	8	6
16	23	6	16	21	18
17	22	8	17	9	5
18	21	10	18	22	17
19	20	12	19	10	4
20	19	14	20	23	16
21	18	16	21	11	3
22	17	18	22	24	15
23	16	20	23	12	2
24	15	22	24	25	14
25	14	24	25	13	1
26	X	X	X	26	X

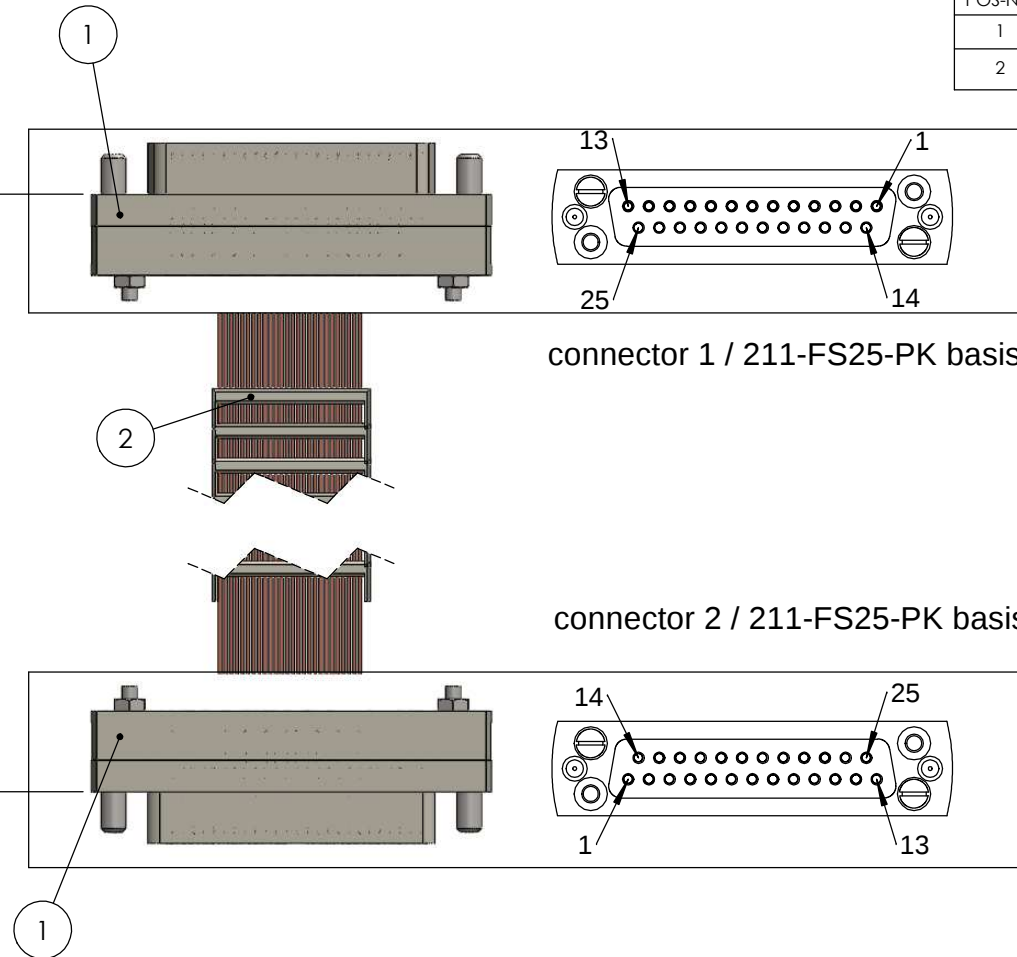

connector 1 / 211-FS25-PK basis for feedthrough

connector 2 / 211-FS25-PK basis customer

Bemerkungen (Remarks)				Freimaßtoleranz (Standard Toleranz)		Maßstab (Scale)	Rauheit (Roughness)		europ.Projektion	
All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allestra GmbH.				Datum		1:10	Material, Standard Oberfläche (Treatment)		Kanten (edges)	
				Design	14.07.2016	JB	Bezeichnung (Title)		Gewicht (weight)	
				Drawn	27.07.2016	FW				
				Check						
							cabel with 2 of 25 pin female connectors PEEK 1 x 26 way ribbon cable		89.93	
							Zeichnungsnummer (Drawing No.)		Revision	
							380-D25-FFPR-X		Format A4	
Index	Modification	Datum	Name				Datei (File)		C:\PDMStore\I:\PDMStore\	

allestra