


connecting view connector			connecting view cable		
con1	con2	cable	cable	con1	con2
1	13	1	1	1	13
2	12	3	2	14	25
3	11	5	3	2	12
4	10	7	4	15	24
5	9	9	5	3	11
6	8	11	6	16	23
7	7	13	7	4	10
8	6	15	8	17	22
9	5	17	9	5	9
10	4	19	10	18	21
11	3	21	11	6	8
12	2	23	12	19	20
13	1	25	13	7	7
14	25	2	14	20	19
15	24	4	15	8	6
16	23	6	16	21	18
17	22	8	17	9	5
18	21	10	18	22	17
19	20	12	19	10	4
20	19	14	20	23	16
21	18	16	21	11	3
22	17	18	22	24	15
23	16	20	23	12	2
24	15	22	24	25	14
25	14	24	25	13	1
26	X	X	X	26	X

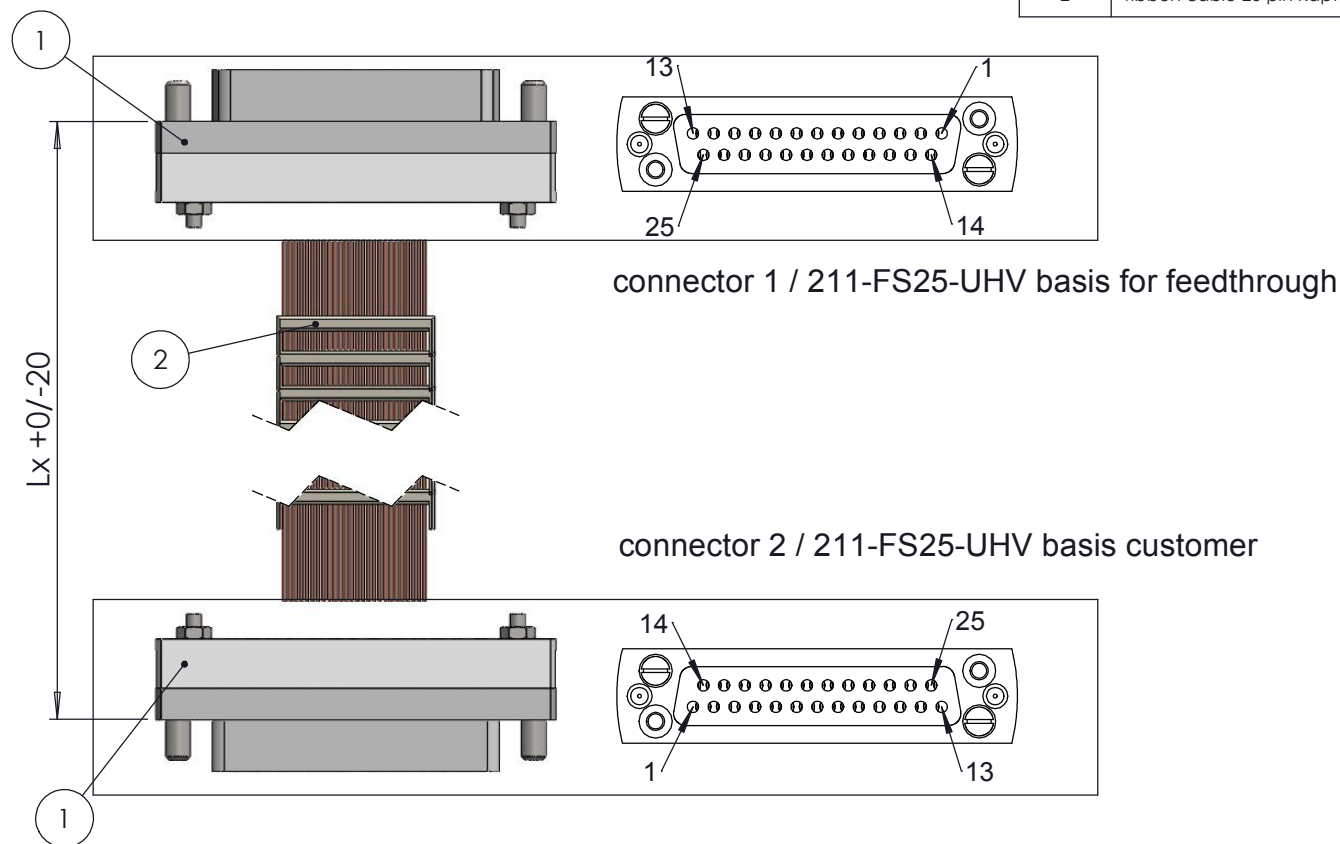

Bemerkungen (Remarks)				Freimaßtoleranz (Standard Toleranz)		Maßstab (Scale)	Rauheit (Roughness)		europ.Projektion	
All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allestra GmbH.						1:10				
					Datum	Name	Material, Standard Oberfläche (Treatment)		Kanten (edges)  	
				Design	14.07.2016	JB				
				Drawn	06.09.2016	FW				
				Check						
						Zeichnungsnummer (Drawing No.) 380-D25-FFUR-X		Revision		
Index	Modification	Datum	Name			Datei (File) C:\PDMStore\C:\PDMStore\		FormatA4		

POS-NR.	DESCRIPTION	QTY
1	UHV connector 25 pin (female)	2
2	ribbon cable 26 pin Kapton insulated	1