


POS-NR.	DESCRIPTION	QTY
1	SUB-D connector 25 pin (HV male) TYP V2	2
2	ribbon cable 25 pin PTFE insulated	1

Connecting view connector			Connecting view cable		
Con1	Con2	Cable	Cable	Con1	Con2
1	13	1	1	1	13
2	12	3	2	14	25
3	11	5	3	2	12
4	10	7	4	15	24
5	9	9	5	3	11
6	8	11	6	16	23
7	7	13	7	4	10
8	6	15	8	17	22
9	5	17	9	5	9
10	4	19	10	18	21
11	3	21	11	6	8
12	2	23	12	19	20
13	1	25	13	7	7
14	25	2	14	20	19
15	24	4	15	8	6
16	23	6	16	21	18
17	22	8	17	9	5
18	21	10	18	22	17
19	20	12	19	10	4
20	19	14	20	23	16
21	18	16	21	11	3
22	17	18	22	24	15
23	16	20	23	12	2
24	15	22	24	25	14
25	14	24	25	13	1

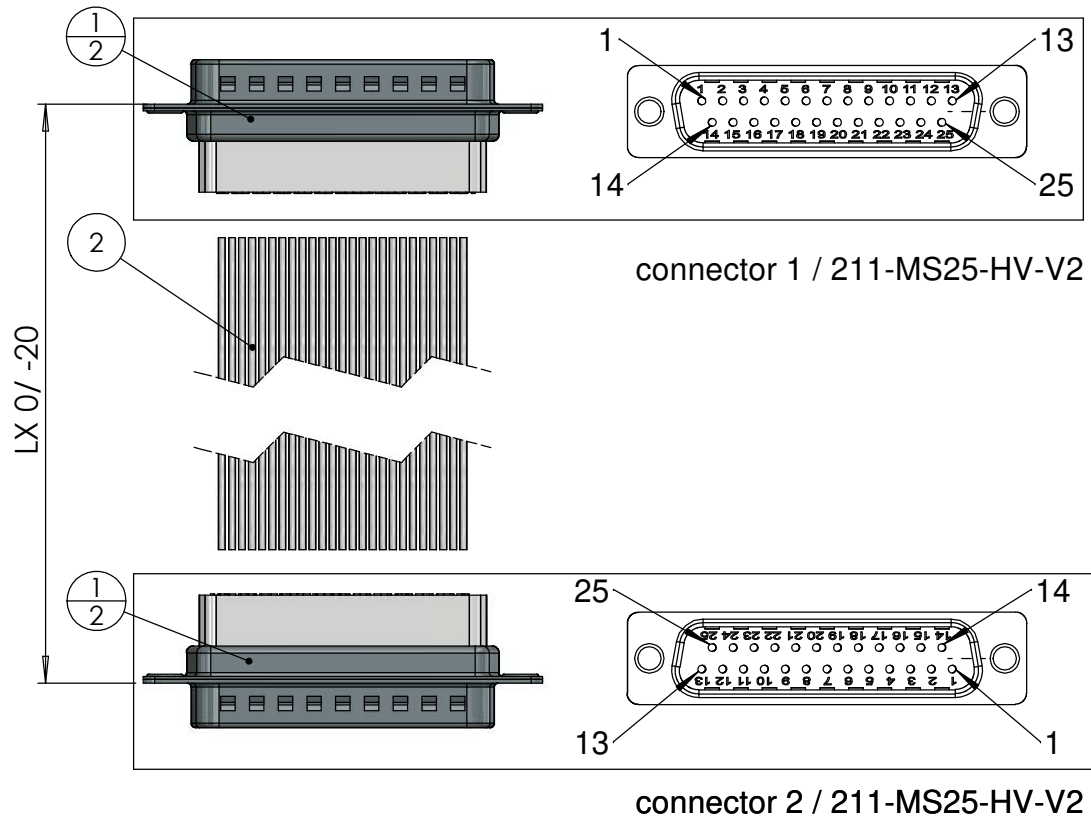

Bemerkungen (Remarks)				Freimaßtoleranz (Standard Toleranz)		Maßstab (Scale)	Rauheit (Roughness)		europ.Projektion	
All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allestra GmbH.				Datum		1:1	Material, Standard Oberfläche (Treatment)		Kanten (edges)	
				Design	22.06.2022	AD	Bezeichnung (Title)		Gewicht (weight)	
				Drawn	22.06.2022	AD				
				Check						
							Zeichnungsnummer (Drawing No.)		Revision	
							Datei (File)		Format	
Index				Modification		Datum	Name			

allestra

380-D25-MMHPT-X

C:\PDM-Store\I:\PDM-Store\

A4